



FEATURES:

- Cat6/Cat6a plug
- FTP
- Up To 7mm OD
- 3-Part product



DESCRIPTION:

High performance shielded connector suitable for termination of large outer diameter cables for Category 6 and Category 6A
Accepts solid or stranded cable up to 7mm diameter

RJ45 cables can be terminated in two different ways as defined in TIA/EIA-568. One version is called T-568A and the other is T-568B. Both wiring standards are listed below.


T-568B – Most Common wiring scheme

- 1 – White/Orange (Transmit +)
- 2 – Orange (Transmit -)
- 3 – White/Green (Receive +)
- 4 – Blue
- 5 – White/Blue
- 6 – Green (Receive -)
- 7 – White/Brown
- 8 – Brown

T-568A

- 1 – White/Green (Receive +)
- 2 – Green (Receive -)
- 3 – White/Orange (Transmit +)
- 4 – Blue
- 5 – White/Blue
- 6 – Orange (Transmit -)
- 7 – White/Brown
- 8 – Brown

TECHNICAL DRAWING:

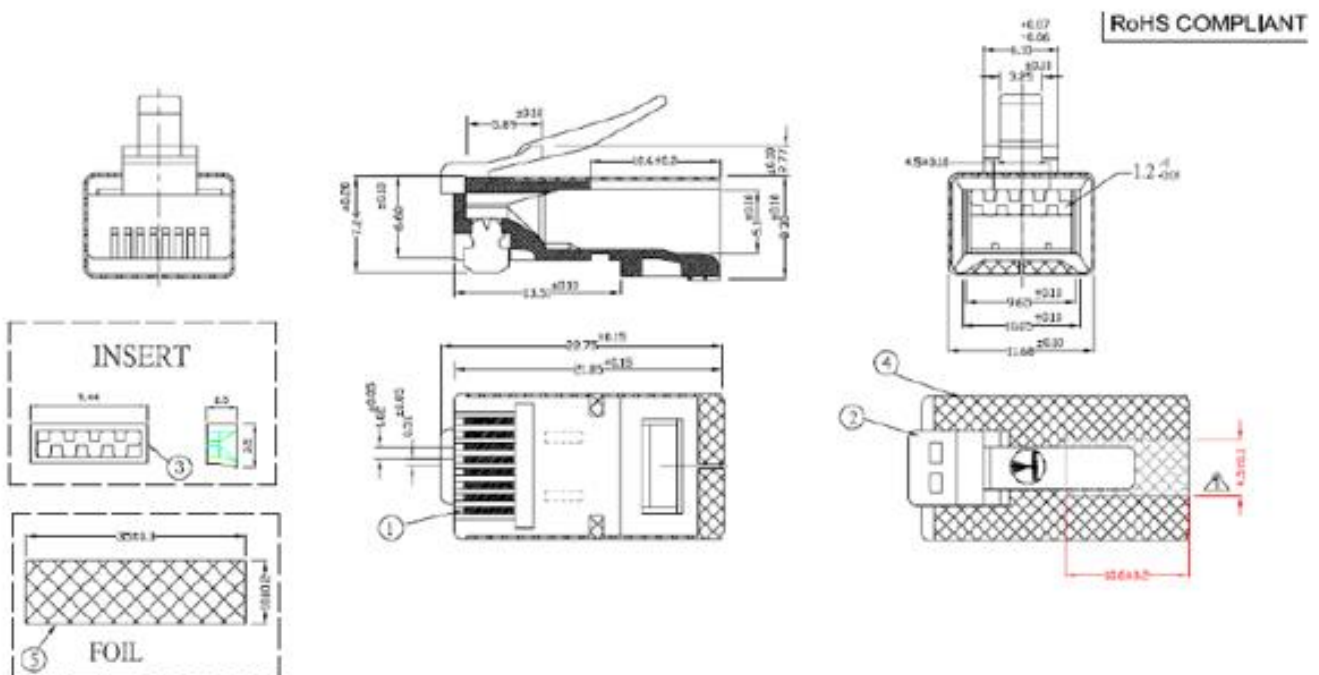

ORDERING INFORMATION:

Part Code	Description
22-2097	Cat6/Cat6a RJ45 FTP Plug Up To 7mm OD (3 Part)