



### FEATURES:

- Cat6 Crimp plug
- FTP
- 50u
- Stranded (2-Part)



### DESCRIPTION:

Performance Cat6/Cat6a shielded 2-Part RJ45 Crimp Plug can be terminated with generic RJ45 crimping tools. Utilising a staggered transparent load bar to maintain pair separation and to offer a consistent level of performance.

Cat6 requires a 6mm Bubble Boot and the Cat6a requires the 6.5mm Bubble Boot

High Performance Crimp Plug

Suitable for 26AWG Stranded Conductors

2-Part Construction

Utilises low cost crimp tools

Accepts solid or stranded cable up to 7mm diameter

RJ45 cables can be terminated in two different ways as defined in TIA/EIA-568. One version is called T-568A and the other is T-568B. Both wiring standards are listed below.


T-568B – Most Common wiring scheme

- 1 – White/Orange (Transmit +)
- 2 – Orange (Transmit -)
- 3 – White/Green (Receive +)
- 4 – Blue
- 5 – White/Blue
- 6 – Green (Receive -)
- 7 – White/Brown
- 8 – Brown

T-568A

- 1 – White/Green (Receive +)
- 2 – Green (Receive -)
- 3 – White/Orange (Transmit +)
- 4 – Blue
- 5 – White/Blue
- 6 – Orange (Transmit -)
- 7 – White/Brown
- 8 – Brown

### TECHNICAL DRAWING:

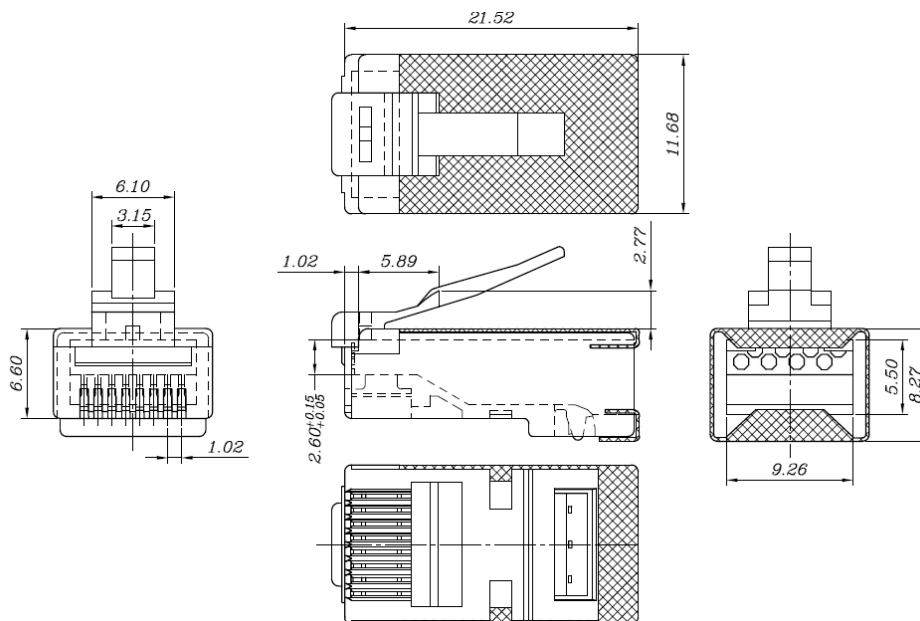

### ORDERING INFORMATION:

Part Code	Description
22-2098A	Cat6 RJ45 FTP 50u Crimp Plug Stranded (2-Part)