



FEATURES:

- C15 Connector
- Rewireable
- Standard straight cable entry
- Maximum temperature of 120°C
- 250V
- Black




DESCRIPTION:

This Rewireable C15 (10A) "Hot Condition" IEC connector uses screw terminals to secure the cable in the connector. This connector is used for a supply line of H05RR-F 3 x 0.75mm² and 3 x 1.0mm² Cable.

SPECIFICATIONS:

Connector: C15 (10Amp) DIN EN 60320-1

TECHNICAL DRAWING:

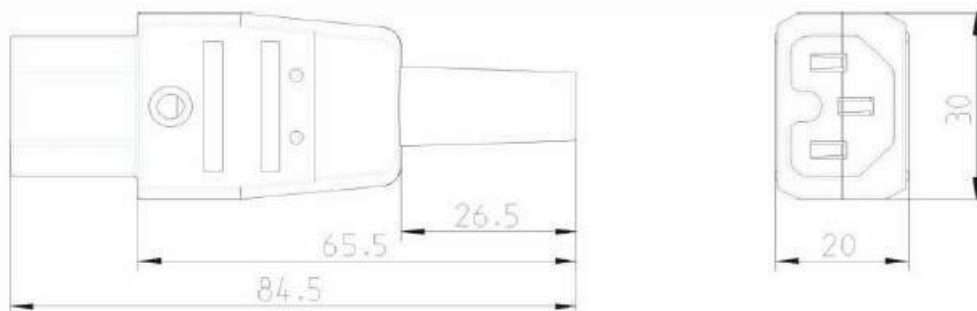

Abisolierung / Wire stripping: N L PE
 20 mm 20 mm 20 mm

ORDERING INFORMATION:

Part Code	Description
42-0505	C15 (10Amp) Hot Condition Power Connector (Screw)