


### FEATURES:



- UK – C15
- Fully moulded connectors
- Black
- Available length: 2m
- H05RN-F 3 x 1.0mm<sup>2</sup> Cable
- CPE

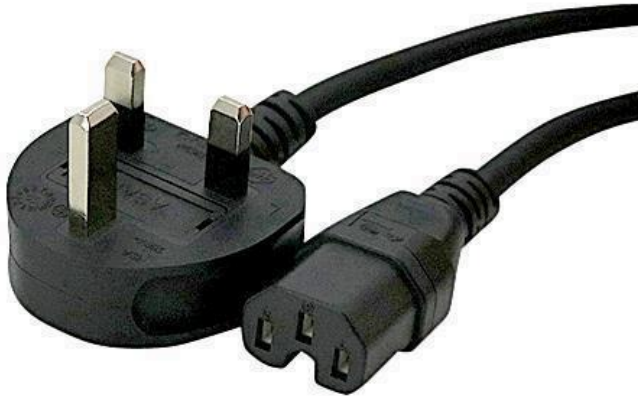


### DESCRIPTION:

The UK – C15 “Hot-condition” mains cable is used for powering a variety of electrical appliances where heat can be an issue - e.g. Cisco Catalyst Switches, HP Procurve switches and Dell Power Connect switches. The connectors are moulded to provide a high-quality cable which is perfect for office and/or comms room use.

### SPECIFICATIONS:

Connector: C15	BS EN60320-1
Plug: UK 13Amp	BS1363-1
Cable: H05RN-F 3 x 1.0mm <sup>2</sup>	IEC 60245-4

### TECHNICAL DRAWING:

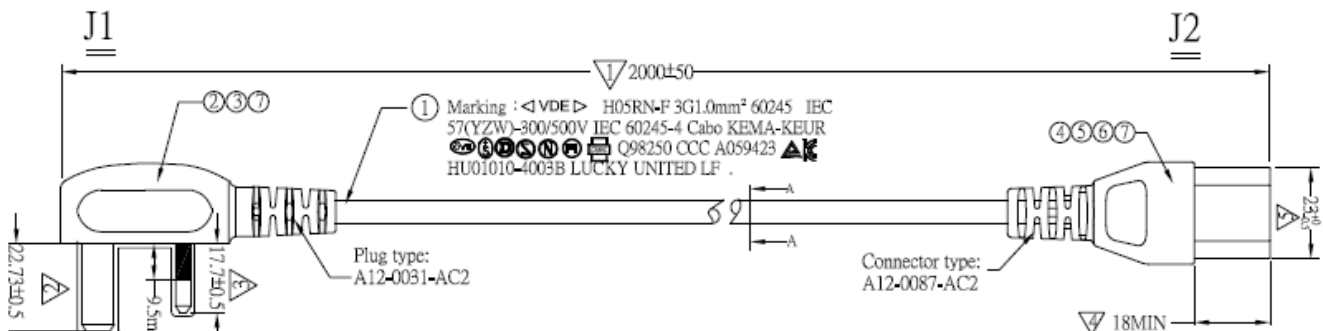

### ORDERING INFORMATION:

Part Code	Description
42-0545	2m UK (13Amp) – IEC C15 Hot Condition Black H05RN-F 1.0mm Power Lead