

## C14 – C15 Power Lead



### FEATURES:

- C14 – C15
- Fully Moulded Connectors
- Black
- Available in 4 Lengths
- 0.75m, 1m & 2m = H05RR-F      3m = H05RN-F Cable
- CPE




### DESCRIPTION:

The C14 – C15 “Hot Condition” jumper cables are used for powering a variety of electrical appliances where heat can be an issue e.g. Cusco Catalyst Switches, HP Procurve switches and Dell Power Connect switches. The connectors are moulded to provide a high-quality cable which is perfect for office and/or comms room use.

### SPECIFICATIONS:

Connector: C15	IEC 60320
Plug: C14	IEC 60320
Cable: H05RR-F & H05RN-F	IEC 60245, VDE 0282-4

### TECHNICAL DRAWING:

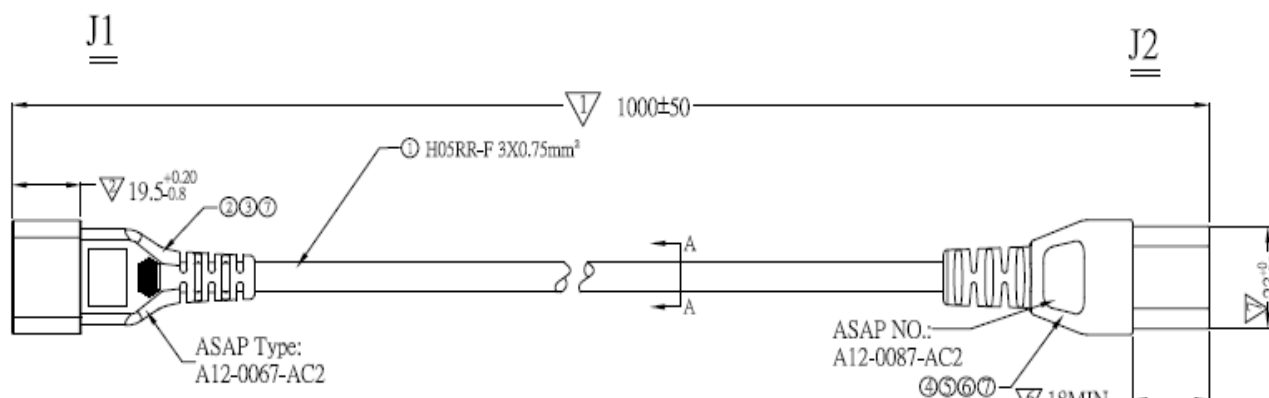

### ORDERING INFORMATION:

Part Code	Description
42-2978	0.75m IEC C14 – IEC C15 Hot Condition Black H05RR-F 0.75mm Power Lead
42-2979	1m IEC C14 – IEC C15 Hot Condition Black H05RR-F 0.75mm Power Lead
42-2980	2m IEC C14 – IEC C15 Hot Condition Black H05RR-F 0.75mm Power Lead
42-2981	3m IEC C14 – IEC C15 Hot Condition Black H05RN-F 1.0mm Power Lead