

C14 – C15 Power Lead



FEATURES:

- C14 – C15
- Fully Moulded Connectors
- Orange
- Available in 5 lengths
- H05RR-F 3 x 1.0mm² Cable
- CPE




DESCRIPTION:

The C14 – C15 “Hot Condition” jumper cables are used for powering a variety of electrical appliances where heat can be an issue – e.g. Cisco Catalyst Switches, HP Procurve switches and Dell Power Connect switches. The connectors are moulded to provide a high-quality cable which is perfect for office and/or comms room use.

SPECIFICATIONS:

Connector: C15	IEC 60320
Plug: C14	IEC 60320
Cable: H05RR-F	EN 50525-2

TECHNICAL DRAWING:

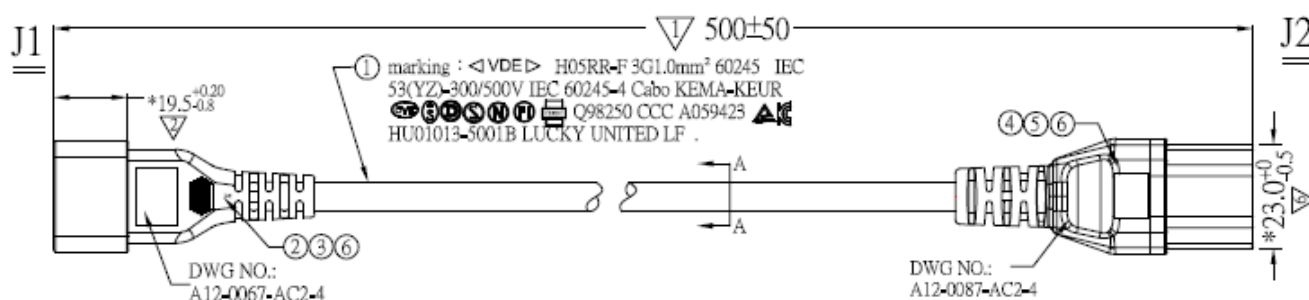

ORDERING INFORMATION:

Part Code	Description
42-2990	0.5m IEC C14 – IEC C15 Hot Condition Orange H05RR-F 1.0mm Power Lead
42-2991	1m IEC C14 – IEC C15 Hot Condition Orange H05RR-F 1.0mm Power Lead
42-2992	1.5m IEC C14 – IEC C15 Hot Condition Orange H05RR-F 1.0mm Power Lead
42-2993	2m IEC C14 – IEC C15 Hot Condition Orange H05RR-F 1.0mm Power Lead
42-2994	3m IEC C14 – IEC C15 Hot Condition Orange H05RR-F 1.0mm Power Lead