

Product Description

- Cable management solution
- Supports easy installation, moves, additions and changes
- Cable friendly design, no sharp edges
- Up to 100% visual cable loading
- Approved for all types of cables
- Mechanical system for easy installation
- For fire and smoke barriers
- Fire rated by design, no firestop handling
- Compliant all the time

Applications

- For all types of cables (up to Ø50 mm)
- Rigid walls, flexible walls and rigid floors

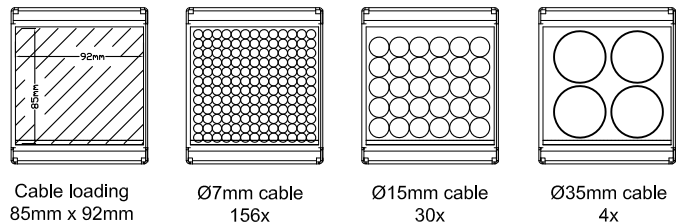
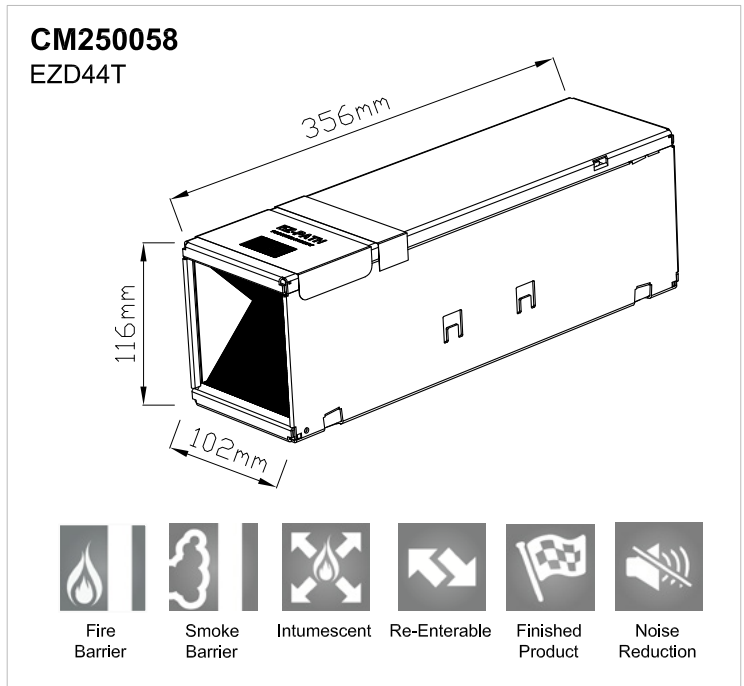
Firestop Handling

- No handling required for safety compliance

Technical Data

Fire Resistance (EN 1366-3)	4 Hours
Classification (EN 13501-2)	EI 120
Reaction to Fire (EN 13501-1)	Class E
Sound Insulation (ASTM E90)	STC 54 (relates to specific construction)
Air Leakage (EN1026 and UL1479)	1.57 m3/h, 0% cable 3.24 m3/h, 100% cables
Durability and Serviceability	Type Y2

Shell Composition	1.5 mm thick galv. steel
Expansion begins	177 °C
Volume Expansion	800%
In-Service Temperature	Not to exceed 49°C
Shelf Life	No limit
VOC Content ASTM D3960 or EPA Method 24	None



Ordering Information













Approvals

- European Technical Approval ETA - 13/0993



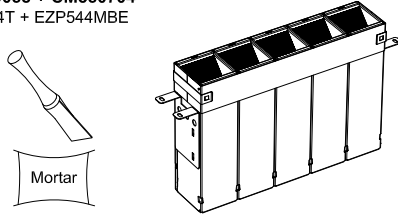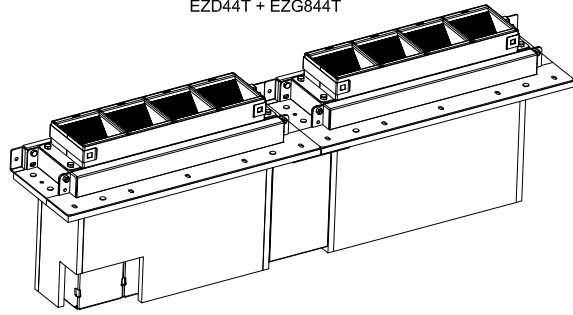
Plate Kits

<p>CM250058 + CM350700 EZD44T + EZP144WE</p>  <p>Up to Ø21mm OD cables</p>	<p>CM250058 + CM350701 EZD44T + EZP144RSE</p>  <p>Up to Ø21mm OD cables</p>	<p>CM250058 + CM250230 EZD44T + EZP144WT</p>  <p>Up to Ø80mm OD cables</p>	<p>CM250058 + CM350703 EZD44T + EZP144MBE</p>  <p>Up to Ø21mm OD cables</p>	<p>CM250058 + CM250260 EZD44T + EZG144T</p>  <p>Up to Ø80mm OD cables</p>
<p>CM250058 + CM350702 EZD44T + EZP544WE</p>  <p>Up to Ø21mm OD cables</p> <p>used in association with Rockwool FirePro® Ablative Coated Batt</p>	<p>CM250058 + CM250250 EZD44T + EZP544WT</p>  <p>Up to Ø80mm OD cables</p>	<p>CM250058 + CM350704 EZD44T + EZP544MBE</p>  <p>Up to Ø21mm OD cables</p> <p>Optional, used in association with Rockwool FirePro® Ablative Coated Batt and Firepro® Compound</p>		
<p>CM250058 + CM250370 EZD44T + EZG444T</p>  <p>Up to Ø80mm OD cables</p>		<p>CM250058 + CM250380 EZD44T + EZG844T</p>  <p>Up to Ø80mm OD cables</p>		



Please refer to the corresponding Application Sheet and Installation Sheet

Accessories

CM250178
EZD44ES



CM250178 + CM250058
EZD44ES + EZD44T

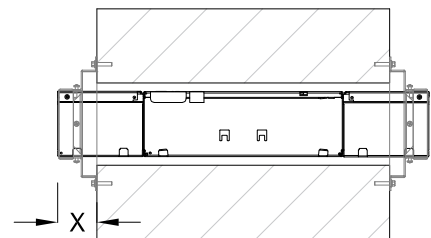

Please refer to the Technical Data Sheet