

enLOGIC

EN Series Horizontal iPDU

Power and Energy Metering (V, A, VA, W, kWh, PF) to +/- 1% billing-grade accuracy.

Circuit Breaker Status Monitoring provides active monitoring and alarming of circuit breaker on/off status (excludes EN1000 series).



Locking IEC Receptacles provide secure power connection when used with optional locking power cords.




Hot Swappable Network Management Card for industry best MTTR.

Color-Coded Outlets by Breaker for easy identification.

Dual Network Access (DNA) in 2N configuration for tenant/client applications or network redundancy.



Localized Convenience Outlets options including UK BS1363, German CEE 7/4, French CEE 7/5, GPO and China Local outlet

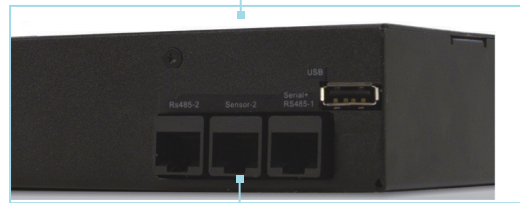

Daisy chain to manage and monitor up to 4 PDUs and 24 environmental sensors through a single IP address.

Environmental Monitoring ready with support for up to 6 plug-and-play sensors.

Horizontal Series

Type	SKU	Size	Input	Cord	Output
Metered	EN1601	1U	16A	IEC309, 16A	(8) C13
	EN1602	2U	32A	IEC309, 32A	(12)C13, (4)C19
Switched	EN2601	1U	16A	IEC309, 16A	(8) C13
	EN2602	2U	32A	IEC309, 32A	(12)C13, (4)C19

Custom configurable PDU options are available

