



RoHS compliant

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

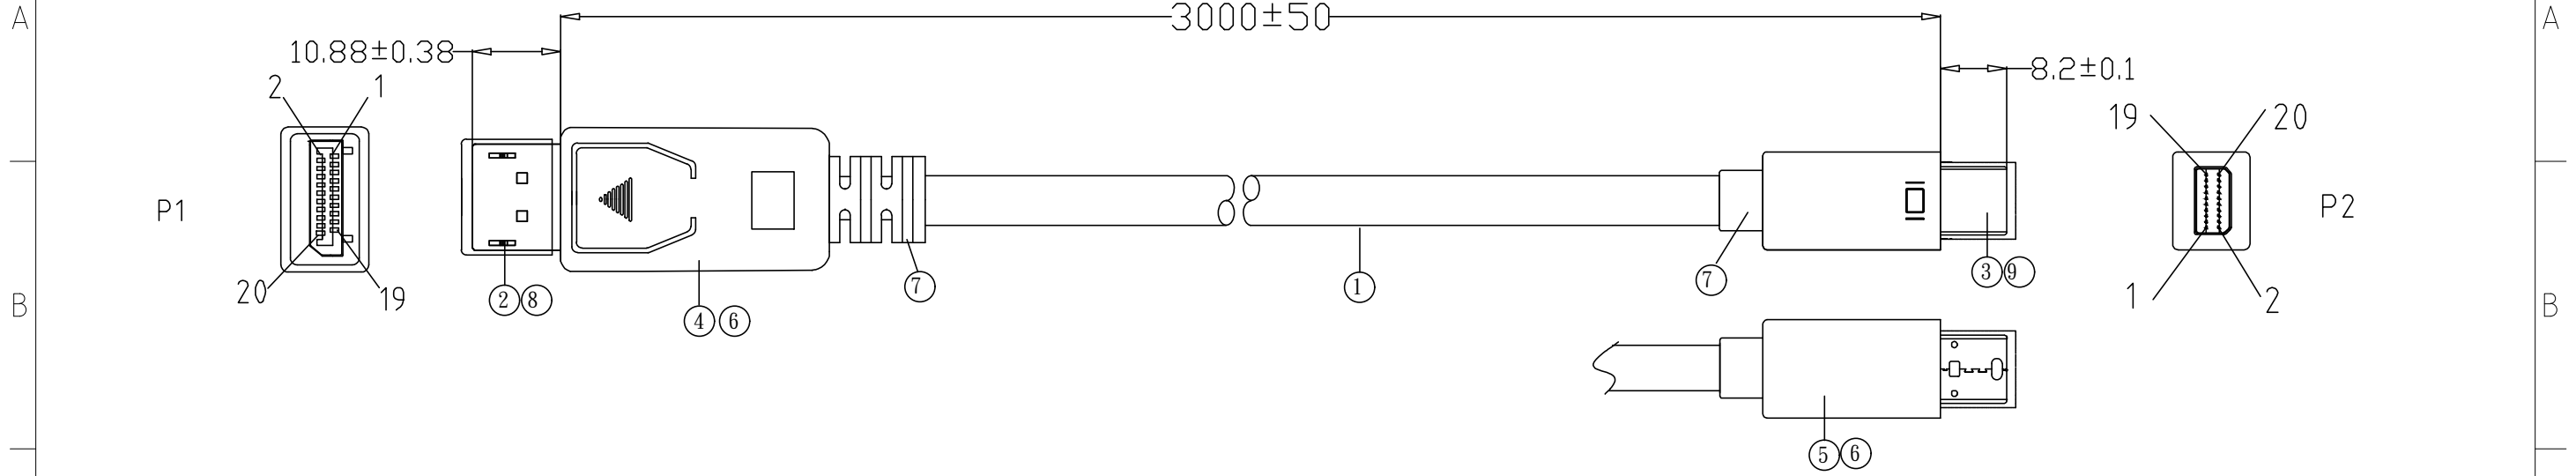

**Electronic Tests:**

- A. Open/Short/Intermittence: 100%
- B. HI-POT:AC 150V 0.01S 1mA
- C. Insulation Resistance: DC 200V 0.01S 10M ohm (Min)
- D. Conductive Resistance: 2 ohm (Max)

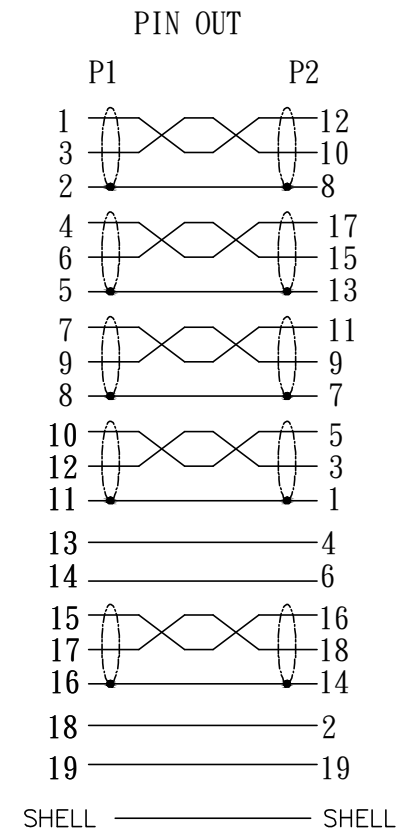

⑨	DUST CAP	MINI DISPLAYPORT M LDPE	1	PCS
⑧	DUST CAP	DISPLAYPORT M LDPE	1	PCS
⑦	MOLDED	60P WHITE PVC	4	G
⑥	MOLDED	LDPE	3	G
⑤	OUTER COVER	MIMI DISPLAYPORT20PIN MALE CONNECTOR WHITE ABS Assembly TYPE OUTER COVER	1	PCS
④	OUTER COVER	DISPLAYPORT 20PIN LATCHING MALE CONNECTOR BLACK ABS Assembly TYPE OUTER COVER	1	PCS
③	CONNECTOR	MINI DISPLAYPORT 20PIN:WHITE INSULATION, Gold PLATED Pin, Gold PLATED SHELL+#32CABLE CLAMP	1	PCS
②	CONNECTOR	DISPLAYPORT 20PIN:BLACK INSULATION, Gold PLATED Pin, Gold PLATED SHELL+#32CABLE CLAMP	1	PCS
①	CABLE	32#[(7/0.08TC)*1P+(1/0.2TC+HD-PE)+FAM]*5+(7/0.08TC)*5C+AL-FOIL+DRAIN WIRE (1/0.254BC)+BRAID(80/0.12AL-MG)White PVC JACKET,OD :4.8±0.2MM MARKING:DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	3000	MM
NO	NAME		Q' TY	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date October.09.2018	File name	Date October.09.2018	Scale FREE
ANGLE:	<b>32-2413A</b>		<b>DP MALE TO MINI DP MALE CABLE,WHITE</b>		
UNIT:MM			Edition 1	Sheet 1/1	