


PIN OUT

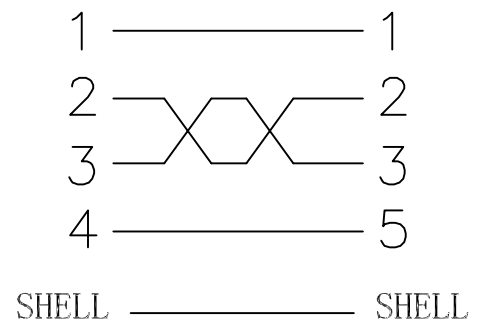

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

| | | | | |
|-----|--------------|--|-------|------|
| ④ | OUTER MOLDED | BLACK 45P PVC | 0.020 | KG |
| ③ | CONNECTOR | MICRO USB B TYPE MALE,BLACK INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ② | CONNECTOR | USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ① | CABLE | USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80℃ 30V VW-1 USB2.0 High Speed Cable-ROHS | 2 | M |
| NO. | MATERIAL | DESCRIPTIONG | QTY. | UNIT |

| | | | | | |
|---------------------|---------------------|---|---|----------------------|---------------|
| LItemref | Quantity | Title/Name,designation,material,dimension etc | Article No./Reference | | |
| Designed by ACHY | Checked by HELEN | Approved by - date MARCH 6.2012 | File name USB AM TO MICRO BM L=2M | Date MARCH 6.2012 | Scale FREE |
| 32 3079 | | | | | |
| 32 3079 | | | | Edition 1 | Sheet 1/1 |