


RoHS compliant

RevNo	Revision note	Date	Signature	Checked

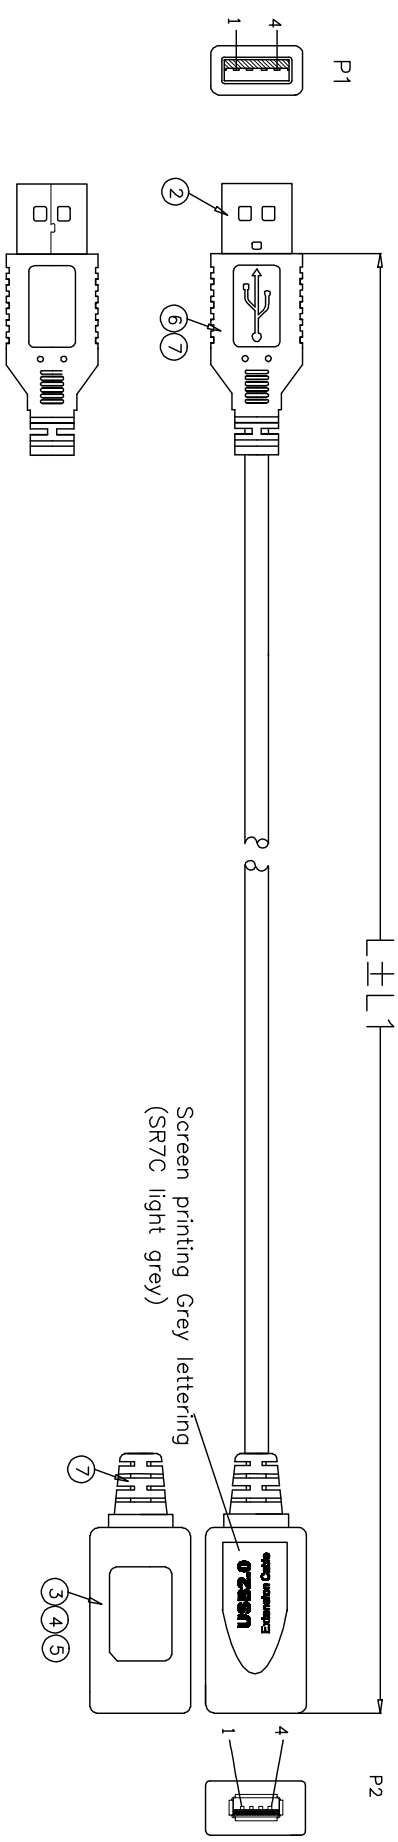


ELECTRONIC TEST:

- A.OPEN/SHORT/INTERMITTENCE: 100%.
- B.HI-POT: AC 300V 0.01S
- C.INSULATION RESISTANCE:DC300V 0.01S 10MΩ(MIN)
- D.CONDUCTIVE RESISTANCE:10 OHM (MAX)

P/N	L#L1
32 3588	5000#70
32 3589	10000#100

PIN OUT

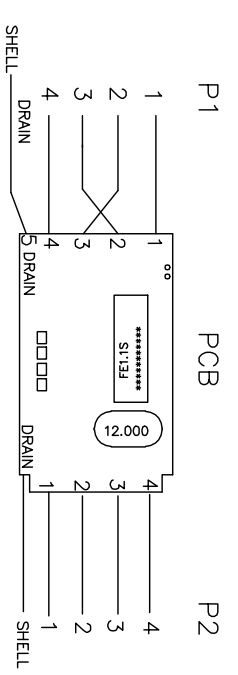

NO	NAME	SPECIFICATIONS	Q'TY	UNIT
⑦	MOLDED	45P BLACK PVC	16	G
⑥	MOLDED	LD-PE	3	G
⑤	PLASTIC SHELL	BLACK ABS SHELL	1	PCS
④	PCB	PCB-FE1.1S	1	PCS
③	CONNECTOR	USB A FEMALE, 90°WHITE GLUE PIN G/F NICKEL PLATED	1	PCS
②	CONNECTOR	USB A MALE, WHITE GLUE PIN G/F NICKEL PLATED	1	PCS
①	CABLE	UL2725 28#(7/0.127TC)*1PR+24#(7/0.2TC) *2C+AL+D(1/0.254BG)+B (64/0.12LMS) BLACK OD=4.8 MARKING: E***** X AMW 2725 80°C 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	L	MM

Itemref	Quantity	Title/Name/designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date October,25,2016	Date October,25,2016
ANGLE:	UNIT:MM	File name 32 358*	Edition 1
		Scale FREE	Sheet 1/1