



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.	L60 XXXX					2014.10.22	A/0	NEW	Sally
						2014.10.23	A/1	Change the wire description	Sally

7	8	9	10
DATE	REV	DESCRIPTION	BY
2014.10.22	A/0	NEW	Sally
2014.10.23	A/1	Change the wire description	Sally

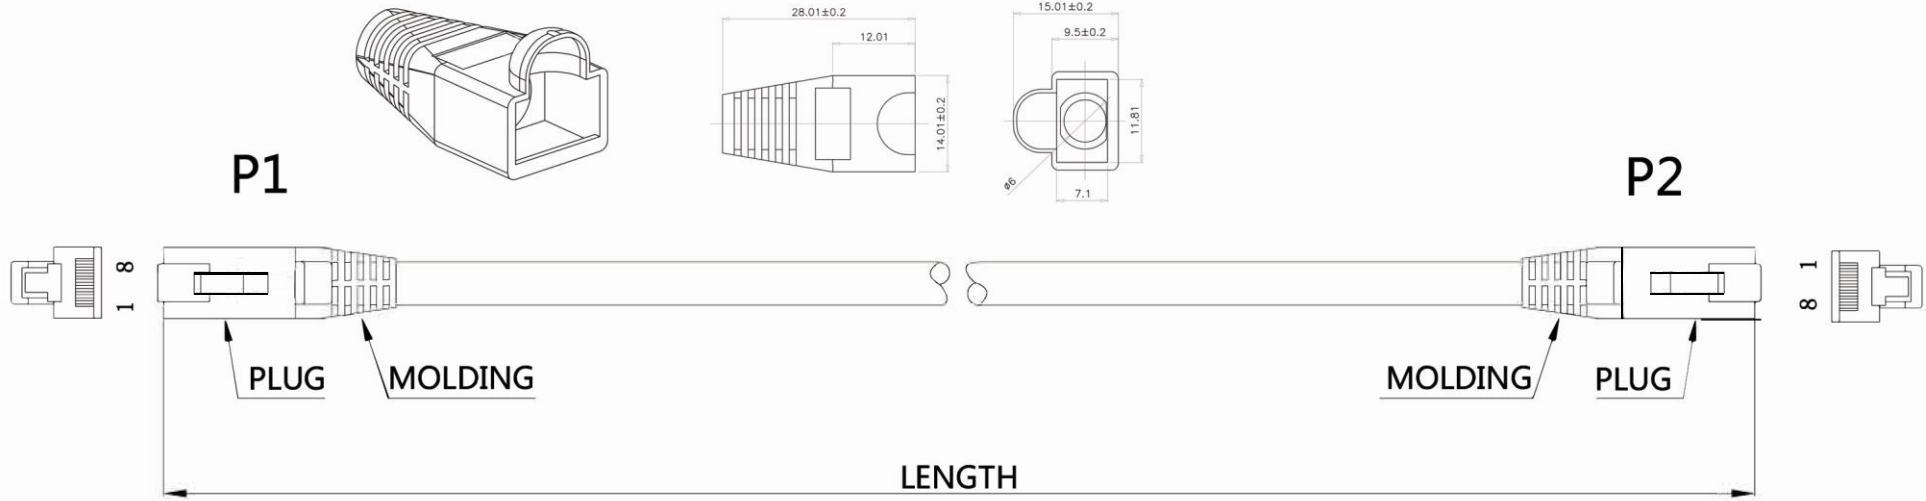

Marking: CAT.6 U/UTP LSOH 24AWGX4P PATCH ANSI/TIA-568-C.2 & ISO/IEC 11801 (FP0714) ED.2 & EN 50288-6-2 & IEC 60332-1-2 FOR GIGABIT ETHERNET

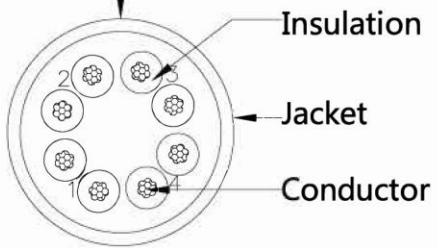

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG 7/0.18±0.06mm
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.95±0.06mm
Jacket	LSOH Thickness:MIN at any point:0.65mm MAX AVG:0.70mm Diameter:5.8±0.15mm
Wire	CAT.6 U/UTP STR 24AWGX4P
PLUG	
Color	XX
Length	12m

Key Size	△	3RD	⊕	□	Part No.	L60 XXXX	APPROVAL	CHECKER	DRAWER
Length	Tolerance				Description	CAT.6 U/UTP 24WAG*4P YU-28 L-942	2014.10.23	2014.10.23	Sally
(mm)	Critical	Normal	General		UNIT	mm	單饒	蔡秀云	
0-15	±0.05	±0.10	±1.0		PAGE	1/2			
15-60	±0.10	±0.20	±1.5		Draw.No.				
60-150	±0.15	±0.35	±2.0						
150-350	±0.20	±0.50							
350-1000	±0.40	±0.65							