

Technical requirement 技术参数:

1. Electrical Characteristics Test 电气性能检验

1.1 Products 100% for electrical test. 成品100%电性测试.

1.2 Insulation resistance: More than 100MΩ of 500V DC, Conductor resistance: Less than 3.0Ω.
绝缘阻抗: 大于或等于100MΩ 500V DC, 导体阻抗小于等于3.0Ω.

2. Finished product conditions 成品状态.

2.1 The attachment plug front show the test mark of 'T'.

2.2 The dimension with '▲' must be control and inspected importantly.
带'▲'尺寸关键点管控和检验.


2.3 material and product comply with Doc No.'QW-Q-043'《material and product-of restricted substance control specification》.
物料及成品必须符合QW-Q-043《材料与成品限用物质管理规范》.

3. The standards for the products. 产品标准.

3.1 The cord shall comply with BS EN 50525. 线材须符合BS EN 50525.

3.2 The socket-outlet shall comply with BS1363-2 : 1995.

插板须符合BS1363-2 : 1995.

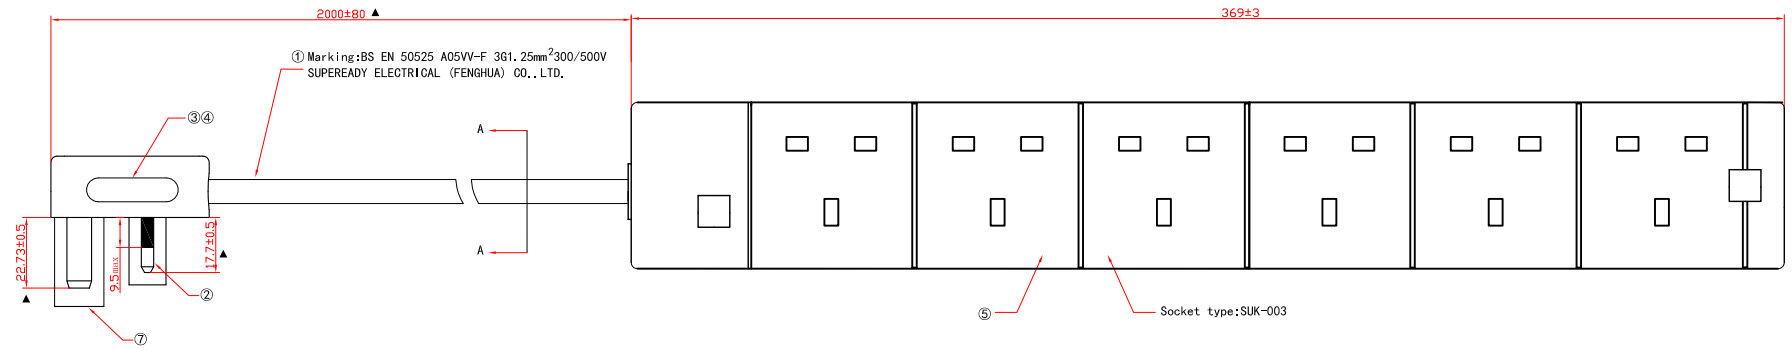



wiring method 接线方式:

J1 cord J2


E—Yellow/Green 黄/绿色—E

L—Brown 棕色—L

N—Blue 蓝色—N

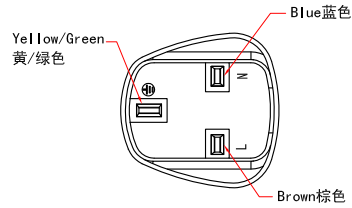

Section: A-A

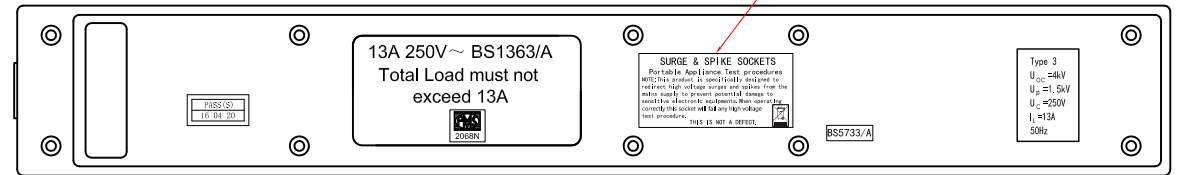

| ITEM | NAME | DESCRIPTION | UNIT | QTY |
|------|-----------------|--|------|-----|
| ⑩ | | | | |
| ⑨ | | | | |
| ⑧ | | | | |
| ⑦ | SLEEVE | Protecting of plug, Black | pcs | 1 |
| ⑥ | Q&A Label | Type L 25x15 Black character on white background | pcs | 1 |
| ⑤ | Socket assembly | UK 6 gang Socket assembly | pcs | 1 |
| ④ | PVC PELLET | 55P black PVC pellets meeting RoHS, UL94 V-0. | g | |
| ③ | FUSE | 13A fuse in line with BS 1363 | pcs | 1 |
| ② | INSERT | UK fuseplug insert with grounding, black | pcs | 1 |
| ① | POWER CORD | A05VV-F 3G1.25mm ² Ø8.8±0.2mm white | mm | / |



Part No. Description
PB-6W2MB 6 Way Power Extension Surge-Spike Protected Black 2m